

9097250 TOSHIBA (DISCRETE/OPTO)

67C 09381 D T-11-07

1SZ57~1SZ59

Silicon Planar Type

Temperature Compensated Zener Diode


INDUSTRIAL APPLICATIONS

Unit in mm

VOLTAGE REGULATION AND VOLTAGE STANDARD APPLICATIONS.

FEATURES:

- . Low Temperature Coefficient of Zener Voltage
: $|r_z| = 0.002\%/^{\circ}\text{C}$ (Max.) (1SZ59)
- . Low Zener Impedance : $r_d = 5\Omega$ (Typ.)
- . Stable and High Reliability.

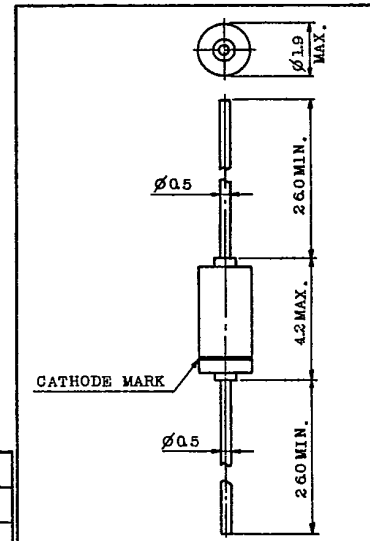

MAXIMUM RATINGS ($T_a = 25^{\circ}\text{C}$)


CHARACTERISTIC	SYMBOL	RATING	UNIT
Power Dissipation	P	250	mW
Junction Temperature	T_j	175	$^{\circ}\text{C}$
Storage Temperature Range	T_{stg}	-65 ~ 175	$^{\circ}\text{C}$
Operating Temperature Range	T_{opr}	-25 ~ 75	$^{\circ}\text{C}$

JEDEC	DO-35
EIAJ	S-40
TOSHIBA	1-2A1A

Note 1 : Marking

Weight : 0.14g

Example : 1SZ58






ELECTRICAL CHARACTERISTICS ($T_a = 25^{\circ}\text{C}$)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Zener Voltage	V_Z	$I_Z = 10\text{mA}$	6.0	6.5	7.0	V	
Reverse Current	I_R	$V_R = 3\text{V}$	-	-	1.0	μA	
Zener Impedance	r_d	$I_Z = 10\text{mA}, f = 1\text{kHz}$	-	5	15	Ω	
Temperature Coefficient of Zener Voltage	1SZ57	$ r_z $	$I_Z = 10\text{mA}, T_a = -25 \sim 75^{\circ}\text{C}$	-	-	0.01	$\%/^{\circ}\text{C}$
	1SZ58			-	-	0.005	
	1SZ59			-	-	0.002	

9097250 TOSHIBA (DISCRETE/OPTO)

67C 09382 D T-11-07

1SZ57~1SZ59

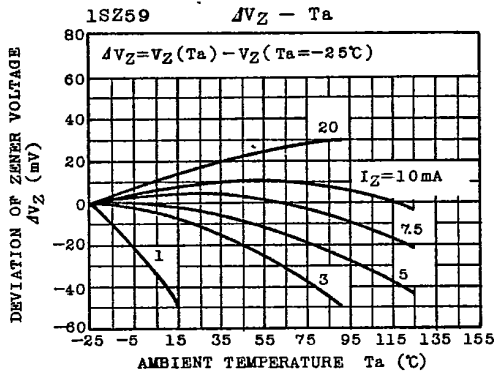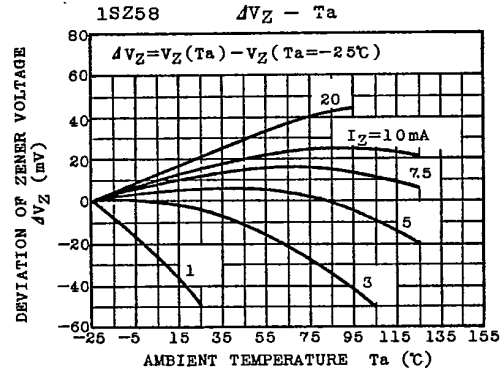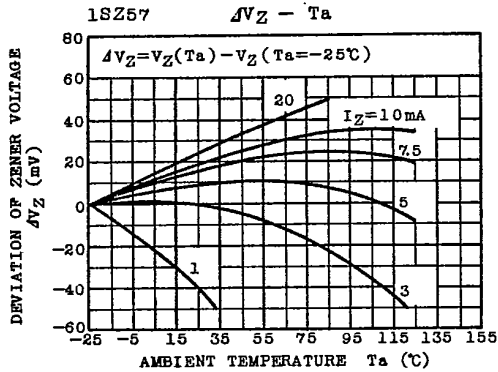

TOSHIBA CORPORATION